

6250IN



Features:

- 3 ½ Digits LCD Display.
- 1999 Counts.
- Backlight.
- Data Hold.
- Auto Ranging.
- 3 in 1 Insulation Resistance Phase Testing & Voltage Testing.
- Rechargeable Battery with Adaptor.

Testing Voltage	1000/2500/5000V
Out Voltage	90%-110% of the test voltage
Range	0.1MΩ - 200GΩ
Resolution	0.01MΩ
Accuracy	0.1MΩ - 200MΩ ± 3% of rdg + 5 digits
	200MΩ - 10GΩ ± 5% of rdg + 5 digits
	10GΩ - 200GΩ ± 10% of rdg + 5 digits

AC VOLTAGE


Range	Resolution	Accuracy
0 - 600V	1V	2.0% of rdg + 5 digits

POWER

AA 1.5V X 8

- Standard Accessories : Carrying case, Test Leads, Manual
- Dimension : 150(H) x 100(W) x 70(D)mm

DIT-90

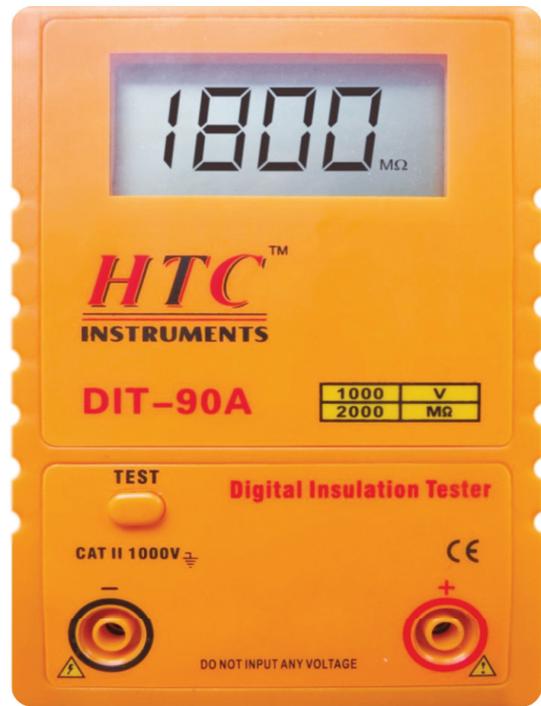

Features:

- 3 ½ DIGIT LCD
- Optional Power Adaptor
- HIGH Accuracy + (3% rdg + 2dgt)
- 5 Models with Various Voltage and Mohm Range
- Single Person Push Button Operation

Model	Rated Voltage	Range	Resolution	Accuracy	Max no. load Voltage
DIT-90A	1000 V	2000 MΩ	1 MΩ	<2 mA ± 3% of rdg + 2 digits	± 25% of rated voltage
DIT-90B	1000 V	200 MΩ	0.1 MΩ		
DIT-90C	500 V	1000 MΩ	1 MΩ		
DIT-90D	500 V	200 MΩ	0.1 MΩ		
DIT-90E	100 V	200 MΩ	0.1 MΩ		

POWER

AA 1.5V X 6

- Standard Accessories : Soft Carrying Case, Test Leads
- Dimension : 139 x 99 x 54 mm

